

AD-A275 006



①

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204 Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1 AGENCY USE ONLY (Leave blank)		2 REPORT DATE November 1993		3 REPORT TYPE AND DATES COVERED Professional Paper																					
4 TITLE AND SUBTITLE ANALYSIS OF UNILATERAL FIN-LINE RESONATORS ON BIAxIAL SUBSTRATES VIA SPECTRAL DOMAIN TECHNIQUE				5 FUNDING NUMBERS In-house																					
6 AUTHOR(S) T. Q. Ho				8 PERFORMING ORGANIZATION REPORT NUMBER																					
7 PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Command, Control and Ocean Surveillance Center (NCCOSC) RDT&E Division San Diego, CA 92152-5001				10 SPONSORING/MONITORING AGENCY REPORT NUMBER																					
9 SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Naval Command, Control and Ocean Surveillance Center (NCCOSC) RDT&E Division San Diego, CA 92152-5001																									
11 SUPPLEMENTARY NOTES																									
12a DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.																									
13 ABSTRACT (Maximum 200 words) <p>At millimeter frequencies, it has been found that substrate anisotropy plays an important role in determining the characteristics of ICs. Regardless whether anisotropy occurs naturally or is purposely implanted, it must be considered. Until now, the analysis of unilateral fin-line resonators has been devoted using isotropic substrate as the supporting medium. This paper presents an approach based on the spectral domain technique which can be used to study fin-line resonators printed on biaxial substrates.</p> <p>Published in <i>IEEE AP-S International Symposium</i>, Vol 2, 1993, pp. 558-561.</p> <p>DATA QUALITY INSPECTED 5</p>																									
<table border="1"><tr><td colspan="2">Accession For</td></tr><tr><td>NTIS</td><td>CRA&I <input checked="" type="checkbox"/></td></tr><tr><td>DTIC</td><td>TAB <input type="checkbox"/></td></tr><tr><td colspan="2">Unannounced <input type="checkbox"/></td></tr><tr><td colspan="2">Justification</td></tr><tr><td colspan="2">By _____</td></tr><tr><td colspan="2">Distribution /</td></tr><tr><td colspan="2">Availability Codes</td></tr><tr><td>Dist</td><td>Avail and/or Special</td></tr><tr><td>A-1</td><td>20</td></tr></table>						Accession For		NTIS	CRA&I <input checked="" type="checkbox"/>	DTIC	TAB <input type="checkbox"/>	Unannounced <input type="checkbox"/>		Justification		By _____		Distribution /		Availability Codes		Dist	Avail and/or Special	A-1	20
Accession For																									
NTIS	CRA&I <input checked="" type="checkbox"/>																								
DTIC	TAB <input type="checkbox"/>																								
Unannounced <input type="checkbox"/>																									
Justification																									
By _____																									
Distribution /																									
Availability Codes																									
Dist	Avail and/or Special																								
A-1	20																								
14 SUBJECT TERMS fin-line resonator substrate anisotropy				15 NUMBER OF PAGES																					
				16 PRICE CODE																					
17 SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED		18 SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED		19 SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED																					
				20 LIMITATION OF ABSTRACT SAME AS REPORT																					

DTIC
ELECTE
JAN 12 1994
S E D

94-01403



94 1 11 191

UNCLASSIFIED

21a NAME OF RESPONSIBLE INDIVIDUAL T. Q. Ho	21b TELEPHONE (include Area Code) (619) 553-3783	21c OFFICE SYMBOL Code 824

ANALYSIS OF UNILATERAL FIN-LINE RESONATORS ON BIAxIAL SUBSTRATES VIA SPECTRAL DOMAIN TECHNIQUE

Thinh Q. Ho
NCCOSC, RDT & E Division
San Diego, CA 92152-5000

Introduction

At millimeter frequencies, it has been found that substrate anisotropy plays an important role in determining the characteristics of ICs [1-3]. Regardless whether anisotropy occurs naturally or is purposely implanted, it must be considered. Until now, the analysis of unilateral fin-line resonators has been devoted using isotropic substrate as the supporting medium. This paper presents an approach based on the spectral domain technique which can be used to study fin-line resonators printed on biaxial substrates.

Formulation

Fig. 1 shows the geometry of the unilateral fin-line resonator. The biaxial layer is arbitrarily located inside the rectangular waveguide. The resonator is formed by a slot printed on one side of the supporting medium. The material permittivity is characterized by the following dyadic tensor

$$\bar{\epsilon} = \epsilon_x \hat{x}\hat{x} + \epsilon_y \hat{y}\hat{y} + \epsilon_z \hat{z}\hat{z} \quad (1)$$

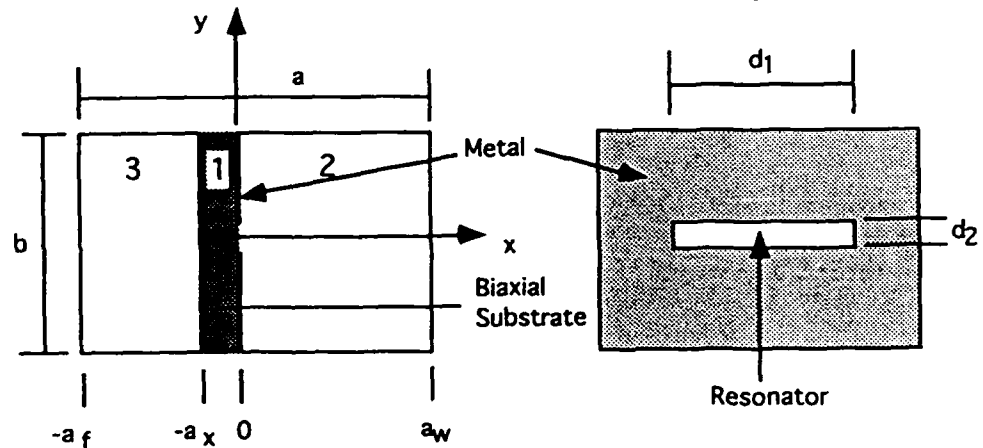


Fig. 1. Configuration of the unilateral fin-line resonator.

Since the slot extends in the direction of propagation, the Fourier transform of field quantities in terms of z and y is considered. The Fourier transform of quantity Φ is defined as

$$\tilde{\Phi}(\alpha, \beta) = \int_{-b/2}^{b/2} \int_{-\infty}^{\infty} \Phi(y, z) e^{j\alpha y} e^{j\beta z} dy dz \quad (2)$$

where α and β are the transformed variables with respect to y and z . Note that α is discrete and β is continuous.

In the biaxial region with no sources, the tangential electric fields satisfy the fourth order differential equation

$$\frac{d^4 \bar{E}_{y,z}}{dx^4} + Q_1 \frac{d^2 \bar{E}_{y,z}}{dx^2} + Q_2 \bar{E}_{y,z} = 0 \quad (3)$$

where coefficients Q_1 and Q_2 are functions of the permittivity and transformed variables. In the isotropic regions, the fields in general can be written in terms of Hertz potential functions [3]. The solutions for the z component of the electric field in the three regions after applying the boundary conditions are:

$$\begin{aligned} \bar{E}_z^1 = & A_n' \sin \gamma_{1a}(x + a_x) + B_n' \sin \gamma_{1b}(x + a_x) \\ & + C_n' \cos \gamma_{1a}(x + a_x) + D_n' \cos \gamma_{1b}(x + a_x) \end{aligned} \quad (4)$$

$$\bar{E}_z^2 = \left[\frac{\omega \mu_0}{\beta} \gamma_2 A_n - j \alpha B_n \right] \sin \gamma_2 (x - a_w) \quad (5)$$

$$\bar{E}_z^3 = \left[\frac{\omega \mu_0}{\beta} \gamma_3 C_n - j \alpha D_n \right] \sin \gamma_3 (x + a_t) \quad (6)$$

where A_n' , B_n' , C_n' , D_n' , A_n , B_n , C_n , and D_n are unknown constants. To solve for these unknowns, we apply the boundary conditions at the interfaces of $x = 0$ and $x = -a_x$.

$$\left\{ \begin{array}{ll} \bar{E}_y^1 = \bar{E}_y^2 & \bar{E}_z^1 = \bar{E}_z^2 \\ \bar{H}_y^1 - \bar{H}_y^2 = -\bar{J}_z & \bar{H}_z^1 - \bar{H}_z^2 = \bar{J}_y \end{array} \right\} \quad (7a)$$

$$\left\{ \begin{array}{ll} \bar{E}_y^1 = \bar{E}_y^3 & \bar{E}_z^1 = \bar{E}_z^3 \\ \bar{H}_y^1 = \bar{H}_y^3 & \bar{H}_z^1 = \bar{H}_z^3 \end{array} \right\} \quad (7b)$$

Systematically simplifying equation (7) yields a set of algebraic equations that relates the current densities \bar{J}_y and \bar{J}_z on the conducting metal fins with the electric fields \bar{E}_y and \bar{E}_z in the slot,

$$\begin{bmatrix} \bar{Y}_{yy}(k_0) & \bar{Y}_{yz}(k_0) \\ \bar{Y}_{zy}(k_0) & \bar{Y}_{zz}(k_0) \end{bmatrix} \begin{bmatrix} \bar{E}_y \\ \bar{E}_z \end{bmatrix} = \begin{bmatrix} \bar{J}_y \\ \bar{J}_z \end{bmatrix} \quad (8a)$$

where the dyadic Green's function elements are given by

$$\begin{aligned} \bar{Y}_{yy} = & \frac{1-P_4}{P_6} \left\{ \frac{H_5(k_0^2 - \beta^2)}{\gamma_2 \tan \gamma_2 a_w} - H_1 + \frac{\alpha \beta H_3}{\gamma_2 \tan \gamma_2 a_w} \right\} \\ & + \frac{1+P_1}{P_3} \left\{ \frac{H_6(k_0^2 - \beta^2)}{\gamma_2 \tan \gamma_2 a_w} - H_2 + \frac{\alpha \beta H_4}{\gamma_2 \tan \gamma_2 a_w} \right\} \end{aligned} \quad (8b)$$

$$\begin{aligned} \bar{Y}_{yz} = & \frac{P_5 - s_2}{P_6} \left\{ \frac{H_5(k_0^2 - \beta^2)}{\gamma_2 \tan \gamma_2 a_w} - H_1 + \frac{\alpha \beta H_3}{\gamma_2 \tan \gamma_2 a_w} \right\} \\ & - \frac{s_1 + P_2}{P_3} \left\{ \frac{H_6(k_0^2 - \beta^2)}{\gamma_2 \tan \gamma_2 a_w} - H_2 + \frac{\alpha \beta H_4}{\gamma_2 \tan \gamma_2 a_w} \right\} \end{aligned} \quad (8c)$$

$$\bar{Y}_{zy} = \frac{1-P_4}{P_6} \left\{ \frac{H_3 \cot \gamma_2 a_w (\gamma_2^2 k_o^2 + \alpha^2 \beta^2)}{\gamma_2 (k_o^2 - \beta^2)} + H_7 + \frac{\alpha \beta H_5}{\gamma_2 \tan \gamma_2 a_w} \right\} + \frac{1+P_1}{P_3} \left\{ \frac{H_4 \cot \gamma_2 a_w (\gamma_2^2 k_o^2 + \alpha^2 \beta^2)}{\gamma_2 (k_o^2 - \beta^2)} + H_8 + \frac{\alpha \beta H_6}{\gamma_2 \tan \gamma_2 a_w} \right\} \quad (8c)$$

$$\bar{Y}_{zx} = \frac{P_5 - S_2}{P_6} \left\{ \frac{H_3 \cot \gamma_2 a_w (\gamma_2^2 k_o^2 + \alpha^2 \beta^2)}{\gamma_2 (k_o^2 - \beta^2)} + H_7 + \frac{\alpha \beta H_5}{\gamma_2 \tan \gamma_2 a_w} \right\} - \frac{S_1 + P_2}{P_3} \left\{ \frac{H_4 \cot \gamma_2 a_w (\gamma_2^2 k_o^2 + \alpha^2 \beta^2)}{\gamma_2 (k_o^2 - \beta^2)} + H_8 + \frac{\alpha \beta H_6}{\gamma_2 \tan \gamma_2 a_w} \right\} \quad (8d)$$

with $S_1, S_2, H_1, \dots, H_8, P_1, \dots, P_5$, and P_6 representing modal terms.

The parameters \bar{J}_y and \bar{J}_z in equation (8a) can now be eliminated using Galerkin's procedure and Parseval's relation. After expanding the electric field distributions in the slot in terms of basis functions, the inner product is performed to obtain the characteristic equation

$$\begin{bmatrix} \sum_{m=1}^N \sum_{n=-\infty}^{\infty} \int \bar{\mathbf{e}}_y \cdot \bar{\mathbf{Y}}_{yy}(k_o) \bar{\mathbf{e}}_{ym} d\beta & \sum_{m=1}^M \sum_{n=-\infty}^{\infty} \int \bar{\mathbf{e}}_y \cdot \bar{\mathbf{Y}}_{yz}(k_o) \bar{\mathbf{e}}_{zm} d\beta \\ \sum_{m=1}^N \sum_{n=-\infty}^{\infty} \int \bar{\mathbf{e}}_z \cdot \bar{\mathbf{Y}}_{zy}(k_o) \bar{\mathbf{e}}_{ym} d\beta & \sum_{m=1}^M \sum_{n=-\infty}^{\infty} \int \bar{\mathbf{e}}_z \cdot \bar{\mathbf{Y}}_{zz}(k_o) \bar{\mathbf{e}}_{zm} d\beta \end{bmatrix} \begin{bmatrix} \zeta_m \\ \xi_m \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad (9)$$

which can be used to compute the resonant frequency by setting the determinant of the coefficient matrix equal to zero. The matrix equation (9) is exact. However, the accuracy of the solution depends on the accuracy with which the basis functions represent the true field distribution in the slot.

When the width of the slot is very small compared with the wavelength, the longitudinal component of the electric field makes insignificant contributions to the final solution. In this case, it can be ignored. As a result, equation (9) becomes a one-term equation with $\bar{\mathbf{e}}_y$ given in [4]

$$\bar{\mathbf{e}}_y = \bar{\mathbf{e}}_y(\alpha) \bar{\mathbf{e}}_y(\beta) \quad (10)$$

The basis function $\bar{\mathbf{e}}_y(\beta)$ must satisfy the boundary condition that its amplitude at both ends of the slot is zero. Additionally, this function also takes into account the presence of the waveguide evanescent modes. The expression for $\bar{\mathbf{e}}_y(\alpha)$ is identical to the one used for computing infinitely long fin-lines.

Verification

To verify the theoretical results, consider a special case. The permittivity tensor is reduced from biaxial to a simple isotropic case with $\epsilon_{xx} = \epsilon_{yy} = \epsilon_{zz} = 2.22$, along with $a = 7.112$ mm, $b = 3.556$ mm, $a_x = 0.127$ mm, $a_l = 2.927$ mm, $a_w = 4.185$ mm, and $d_2/b = 0.1$. Fig. 2 shows the resonance characteristics of the fin-line resonator operating at Ka-band. The slot is at the center of the waveguide. As the resonator length d_1 varies from 4.733 mm to 3.102 mm, the resonant frequency increases from 28.0 GHz to 35.0 GHz. The numerical data from reference [4] is reproduced and also presented in this figure for comparison. The two sets of data seem to match very well within the computed range.

Conclusions

The analysis of the unilateral fin-line resonators printed on biaxial substrates is presented. The admittance Green's function is derived through a fourth order formulation. This technique can be further extended to include the magnetic substrate problems where the permeability is a second rank tensor. Even though this analysis is directed toward a single uniform slot, arbitrarily shaped resonators can also be analyzed using this method, as long the correct field expansion functions are provided.

References

- [1] T.Q. Ho and B. Beker, "Spectral Domain Analysis of Shielded Microstrip Lines on Biaxially anisotropic Substrates," IEEE Trans. on Microwave Theory Tech., Vol. 39, June 1991, pp. 1017-1021.
- [2] T.Q. Ho and B. Beker, "Effects of Misalignment on Propagation Characteristics of Transmission Lines Printed on Anisotropic Substrates," IEEE Trans. on Microwave Theory Tech., Vol. 40, May 1992, pp.1018-1021.
- [3] T.Q. Ho, B. Beker, Y.C. Shih, and C. Chen "Microstrip Resonators on Anisotropic Substrates," IEEE Trans. on Microwave Theory Tech., Vol. 40, April 1992, pp. 762-765
- [4] B. Bhat and S.K. Koul, *Analysis, Design and Applications of Fin-Lines*, Artech House, Norwood, MA, 1987, pp. 307-311.

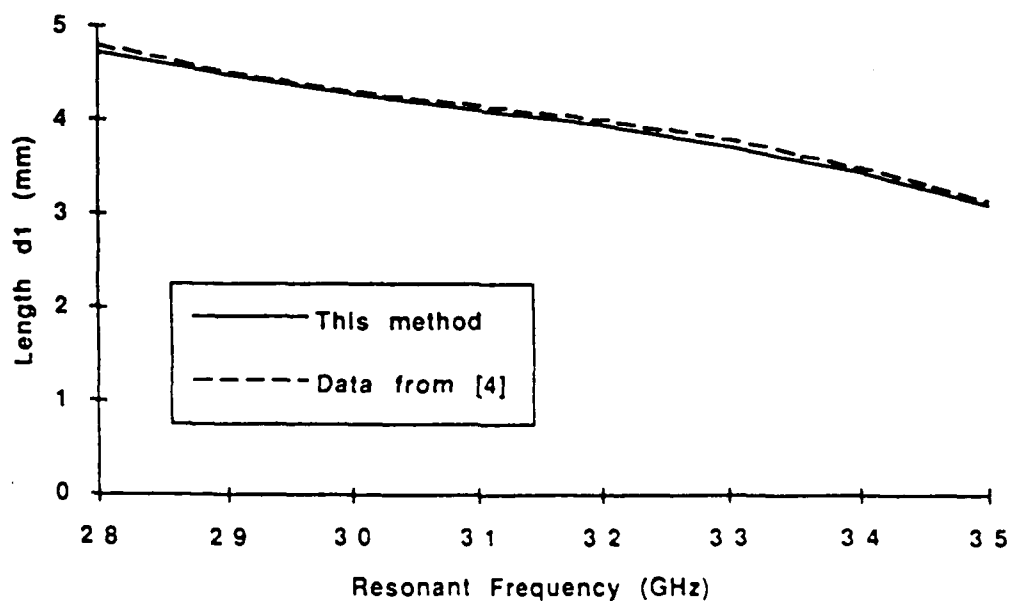


Fig. 2. Variation of length d_1 versus resonant frequency f_0 .